


Modbus (RS485) to the NB-IoT

The RS485 to the NB-IoT converter is designed for efficient readings of any device communicating via RS485, most commonly using the Modbus protocol—for example, actuators, electricity meters and other measurement devices. It enables the integration of the RS485 devices into the NB-IoT wireless network, facilitating the data collection and analysis at specified intervals.

Modbus (RS485) to the NB-IoT

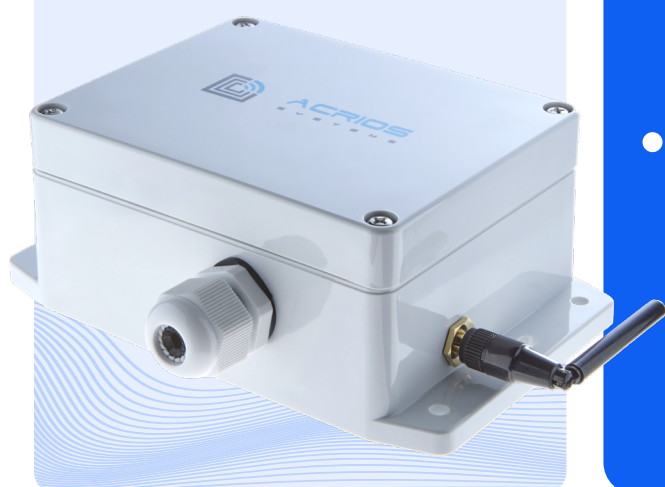

- We can read any sensor or meter with the RS485 communication—whether it's using the Modbus, DLMS or the IEC62052 protocol, either directly or through an optical head.
- Configure your library of the connected meters over the NB-IoT network, set which meters are connected and change the reading period directly from your system without the need for local configuration.
- We can provide the converter with the external power supply options for the sensors or detectors, ranging from 3 to 30 V DC—allowing you to connect the external probes, water level measurement devices or the weather stations.

Installation, Operation and Longevity without Worries

ACRIOS Systems converters can read meters with RS485 communication and protocols over this bus—such as Modbus (RTU, ASCII), DLMS, or IEC 62052, either directly or through an optical head. Our solution is suitable for small businesses and large heating plants, designed for an easy integration into existing systems. The antenna connectors are designed

for the minimal loss and maximum reception sensitivity, making them suitable even in the heat exchanger stations. We use the dual D-Cell batteries, which provide reliable operation for more than 10 years and for the demanding applications, an option with a permanent external power supply is available.

Technical specifications

General specification

Dimension	145 x 90 x 55 mm
Weight	336 g with single battery / 475g with double battery
IP rating	IP67
Mounting	6 fixation points for mounting to the wall, tube or collar
Mounting holes	4x M4 pan screw and 2x oval hole for zip-tie fixation
HS code	85269200

Operating conditions

Operational temperature:	-30 to +60 °C
Humidity	0 to 85% RH (non-condensing)

Regulations and certifications

Standard	CE, RoHS
----------	----------

Device configuration

Local device configuration	Over the cable via ACR-CONFIG and the configuration app
Remote device configuration	Downlink via network
FUOTA support	Yes, over the NB-IoT network
Configuration options	Configuration via LUA scripting interface

NB-IoT

Bands	B1/B2/B3/B4/B5/B8/B12/B13/B14/B17/B20/B26/B28
NB module	SIM7022
Supported protocols	UDP
Antenna	External
TX Power	23 dBm
SIM form factor	3FF, chip SIM on demand
Supported NB-IoT features	PSM, eDRX
Maximum payload length	512 B uplink, 1024B downlink*

* might be dependant on the network. Tested with Vodafone network

Ordering codes

ACR-CV-101N-R-D	RS-485 to NB-IoT single battery pack
ACR-CV-101N-R-D2*	RS-485 to NB-IoT double battery pack

* Under MOQ

RS-485 interface

Communication protocol	Modbus RTU, Modbus ASCII, Profibus DP, IEC 62056, proprietary protocols
Physical layer	RS-485
Device type	Master by default, slave configurable
Communication speed	300 - 115 200 Bd
Maximum connected devices	96 UL
Compatibility	Any device with RS-485 interface
Signals	TX +-, RX +-
Polarization resistors	560 Ohms
Termination resistor	120 Ohms
Functionality	Modbus addressing, two way RS-485 communication, configurable RS-485 interface, RS-485 data receive (slave)
Connector	WAGO 2604 CAGE CLAMP®

Optional auxiliary power supply*

Voltage	5V - 24V DC
Connector	WAGO 2604 CAGE CLAMP®

* Version with auxiliary power supply has its own ordering code

Battery specifications

Battery size	D-Cell / double D-Cell
Capacity	19 000 mAh / 38 000 mAh
Self-discharge	<1%
Rechargeable	No
Replacable by the customer	Yes
Battery connector	JST-XH 2pin

Packaging

1x RS-485 to NB-IoT converter	1x installation manual
1x Battery	1x NB-IoT 2JW1024 antenna; 4G LTE

Optional accessories

ACR-CONFIG	Configuration cable
------------	---------------------

ACR-CV-101N-R12-D	RS-485 to NB-IoT single battery pack with 5V - 24V DC auxiliary power supply
ACR-CV-101N-R12-D2*	RS-485 to NB-IoT double battery pack with 5V - 24V DC auxiliary power supply

* Under MOQ