


Pulse Input S0 to LoRaWAN

Our converter with four S0 inputs to LoRaWAN is designed for reading devices with the pulse outputs, such as electricity meters, water meters and other measurement devices. It enables integration the traditional S0 meters into the LoRaWAN wireless network, facilitating data collection and analysis at intervals according to the user's needs.

\ Pulse Input S0 to LoRaWAN

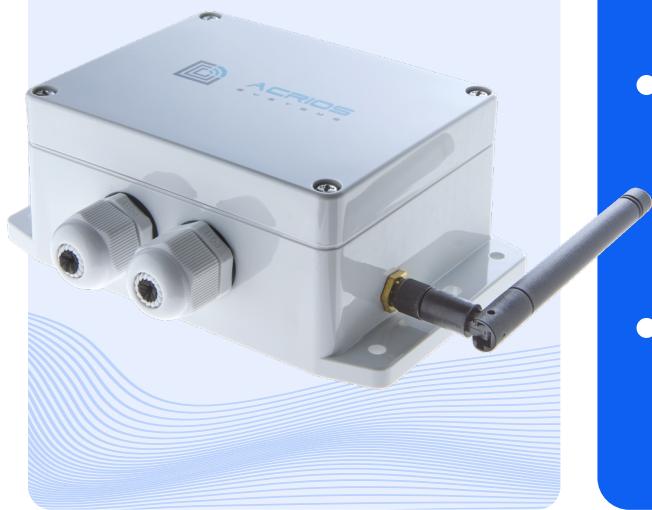

- We can read any meter or device with the pulse output within your installation. The pulse output is currently one of the most common outputs on the existing meters and you can connect up to four devices to our unit simultaneously.
- Thanks to the possibility of local configuration via cable and the remote configuration over the network, our device significantly reduces the total cost of ownership in projects requiring frequent remote readings of the S0 meters.
- The device stores a number of pulses and always sends the last three values in case of a network outage. Users can also set the alarm threshold values, where a message will be sent immediately regardless of the set reading interval to detect sudden measurement anomalies.
- With our scripting interface, it is easy to implement specific functions such as the dual-tariff measurement, continuous sampling, history storage and a remote retrieval or the time synchronization with the network.

\ Installation, Operation and Longevity without Worries

ACRIOS Systems converters can read any meter or device with the pulse output while allowing you to connect up to four devices simultaneously. Our products have been tested within the biggest LoRaWAN networks in Europe as well as in isolated systems.

We have an extensive set of experience

in building and operation of the private LoRaWAN networks, which allows us to utilize the maximum values utilization sent in a single message by our converters. Through our devices, it is possible to transmit both the current and historical readings for the comparison purposes.

\ \ Technical Specifications

General Specification		SO Interface			
Dimension	145 x 90 x 55 mm	A number of inputs	4		
Weight	166 g	Impulse counter	32 bits = 4 294 967 295 pulses		
IP rating	IP67	Minimum pulse duration (ms)	30		
Mounting	6 fixation points for mounting to the wall, tube or collar	Maximum input voltage (V)	24		
Mounting holes	4x M4 pan screw and 2x oval hole for zip-tie fixation	Maximum pulse frequency (Hz)	33		
HS code	85269200	Logical 1 range (V)	More than 2 (up to 24)		
Operating Conditions		Logical 0 range (V)	Less than 1		
Operational temperature	-30 to +60 °C	Closed mechanical contact	Resistance < 100kΩ		
Humidity	0 to 85% RH (non-condensing)	Open mechanical contact	Resistance > 200MΩ		
Regulations and Certifications		ESD rating			
Standard	CE, RoHS	Connector			
Device Configuration		Auxiliary power supply			
Local device configuration	Over the cable via ACR-CONFIG and the configuration app	Functionality			
Remote device configuration	Downlink via network	Device Power Supply			
FUOTA support	Yes	Voltage	85 - 305 V AC		
Configuration options	Configuration via Lua scripting interface	Frequency	47 - 63 Hz		
LoRaWAN		Energy consumption	Max 4 W		
LoRaWAN specification	1.0.3	Connector	WAGO 2604 CAGE CLAMP®		
Registration method	OTAA by default, ABP configurable	Packaging			
Class	A by default, B and C configurable	1x SO to LoRaWAN converter	1x installation manual 1x LoRaWAN 2JW0315-868-C675 antenna		
Frequency	EU868	Optional Accessories			
TX Power	12.7 dBm	ACR-CONFIG	Configuration cable		
Maximum payload length	51B uplink/downlink and up to 235B uplink/downlink*				
* dependent on the network and spreading factor					
Ordering Codes					
ACR-CV-101L-I4-EAC		SO to LoRaWAN externally powered			